


Çok Tellli Çelik Halatlar / Multi Strand Steel Wire Ropes

EN 12385

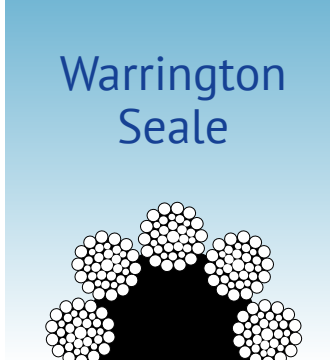

8x36 WS
8[1+7+(7+7)+14]
LÖ/FC

Halat Çapı Rope Diameter	Birim Ağırlık Unit Weight	Minimum Kopma Kuvveti (kN) Minimum Breaking Load (MBL)	
		1770 N/mm ² IPS	1960 N/mm ² EIPS
10,00	0,356	51,9	57,4
11,00	0,431	62,8	69,5
12,00	0,513	74,7	82,7
13,00	0,602	87,6	97,1
14,00	0,698	101,6	112,6
15,00	0,801	117	129
16,00	0,911	133	147
17,00	1,029	150	166
18,00	1,153	168	186
19,00	1,285	187	207
20,00	1,424	207	230
21,00	1,570	229	253
22,00	1,723	251	278
23,00	1,883	274	304
24,00	2,051	299	331
25,00	2,225	324	359
26,00	2,407	351	388
27,00	2,595	378	419
28,00	2,791	407	450
29,00	2,994	436	483
30,00	3,204	467	517
31,00	3,421	498	552
32,00	3,645	531	588
33,00	3,877	565	625
34,00	4,115	600	664
35,00	4,361	635	703
36,00	4,614	672	744
37,00	4,874	710	786
38,00	5,141	749	829
39,00	5,415	789	873
40,00	5,696	830	919
41,00	5,984	872	965
42,00	6,280	915	1013
43,00	6,582	959	1062
44,00	6,892	1004	1112
46,00	7,533	1097	1215
48,00	8,202	1195	1323
50,00	8,900	1297	1436
52,00	9,626	1402	1553
54,00	10,381	1512	1675
56,00	11,164	1626	1801
58,00	11,976	1745	1931
60,00	12,816	1867	2066

ISO 4309'a göre; RCN: 13 / According to ISO 4309; RCN: 13

Kullanım Alanları / Applications Areas



Mühendislik
Engineering



Genel Yük Kaldırma
General Lifting