


## WH BC Sabit Çeneli Super Ray Kısıkaçı

WH BC Fixed Jaw Super Clamp



Çalışma Yüğü WLL (t)	Profil Aralığı Beam Range (mm)	Max. Profil Kalınlığı Max. Beam Thickness (mm)	Ölçüler (mm) Dimensions									Birim Ağırlık Mass (kg)
			A	B	D	E max	E min	G	K max	K min	H	
2	76-190	20	130	3	90	254	133	275	263	223	20	4,0
3,2	76-190	28	130	12	102	275	166	275	289	251	20	8,0
3,2	127-350	28	130	12	102	438	228	560	375	294	20	11,5
4	150-254	24	130	10	112	371	185	410	369	308	25	11,0
5	76-190	24	130	12	116	306	191	295	338	300	25	10,0
5	150-305	24	130	12	116	422	264	410	413	360	25	15,0
6	203-457	36	140	12	116	608	267	560	511	402	25	18,8
10	203-457	36	140	20	118	608	267	560	530	421	32	28,0
15	203-457	66	170	20	116,5	648	400	660	684	608	40	49,5
15	406-610	66	170	20	116,5	800	600	810	812	706	40	58,5

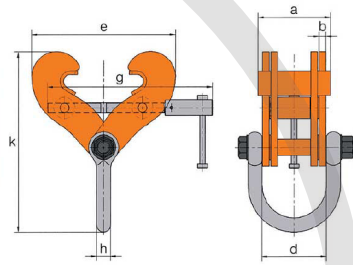

Değişen Açı Uygulamalarında Çalışma Yüğündeki Azalma  
Reduction in Working Load Limits when Side Loads Are Applied

Dikeydeki Açı Angel from Vertical			
0°	0° to 15°	15° to 30°	30° to 45°
İndirgeme Faktörü Reduction Factor			
Nil	17 %	34 %	50 %
WLL	WLL	WLL	WLL
2 ton	N/A	N/A	N/A
3,2 ton	2,5 ton	2 ton	1,5 ton
4 ton	3,3 ton	2,6 ton	2 ton
5 ton	4,1 ton	3,3 ton	2,5 ton
6 ton	5 ton	4 ton	3 ton
10 ton	8,3 ton	6,5 ton	5 ton
15 ton	12,4 ton	10 ton	7,5 ton

