



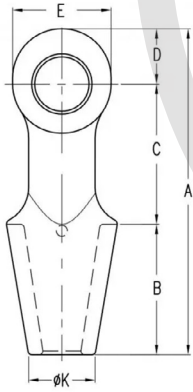

Açık Tip Tutyalı Soket Somunlu DIN 83313

Open Spelter Socket with Bolt acc. to DIN 83313

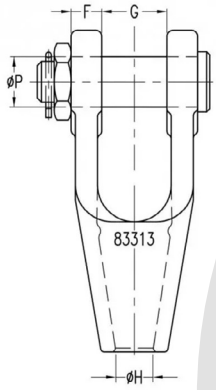

Ürün No Number	Minimum Kopma Yüğü Minimum Breaking Load MBL t	Halat Çapı Diameter Wire Rope mm	Ölçüler Dimensions										Birim Ağırlık Weight Each kg
			a	b	c	d	e	f	g	Ø h	Ø k	Ø p	
1,6	12	12-14	149	60	65	24	44	14	27	17	32	20	1
2,5	20	14-18	177	69	79	29	52	16	33	20	38	24	1,6
3	25	16-20	198	78	87	33	58	18	38	23	43	27	2,1
4	30	18-22	215	84	96	35	62	20	42	25	46	30	2,9
5	40	20-24	242	94	106	42	74	23	47	27	50	36	4,3
6	50	22-28	265	106	114	45	80	25	53	30	54	39	6
8	60	26-30	292	115	127	50	90	27	60	33	60	45	8,5
10	70	28-34	321	125	140	56	100	29	66	36	65	48	11,5
12	80	32-38	354	140	156	58	104	33	73	40	70	52	15
16	120	36-42	399	159	173	67	120	36	81	45	80	60	21,5
20	160	40-44	437	174	190	73	130	42	90	51	90	68	28
25	200	44-48	485	190	215	83	150	63	100	55	100	72	42
32	250	50-54	525	209	231	95	170	70	110	65	118	80	60
40	320	58-64	596	237	263	107	190	79	125	75	132	90	75
50	400	62-68	658	262	288	110	200	80	140	80	150	100	105