


TWN 1830 X-Treme Döner Yataklı Kaldırma Mapası Grade 100

TWN 1830 X-Treme Lifting Point Grade 100

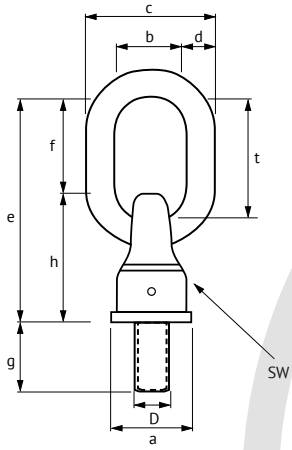

Diş Çapı Screw Size (D)	Çalışma Yüğü WLL (t max)			Diş Boyu Thread Length mm (G)	Ölçüler (mm) Dimensions								Ağırlık (kg) Weight
	Y	Z	X		e	f	d	t	b	a	SW	h	
M10	0,9	0,45	0,6	15	101	46,5	13	55	33	39	36	54,5	0,48
M12	1,2	0,6	0,7	18	101	46,5	13	55	33	39	36	54,5	0,49
M16	2,8	1,4	1,7	20	101	46,5	13	55	33	39	36	54,5	0,50
M20	5,3	2,5	2,8	25	121	58,5	16	70	34	50	46	62,5	0,90
M20	5,3	2,5	2,8	50	121	58,5	16	70	34	50	46	62,5	1,00
M24	7	3,5	4	30	148	72	18	85	40	57	50	76	1,50
M24	7	3,5	4	90	148	72	18	85	40	57	50	76	1,70
M30	10	5,3	6,3	40	170,5	83	22	100	50	73	65	87,5	2,70
M36	15	8	9,5	50	179	81	22	100	50	83	70	98	3,60
M36	15	8	9,5	63	179	81	22	100	50	83	70	98	3,80
M36	15	8	9,5	70	179	81	22	100	50	83	70	98	3,90
M42	18	10	12,5	60	244	116	32	140	70	106	95	128	8,30
M45	18	12,5	16,5	65	244	116	32	140	70	106	95	128	8,40
M48	20	12,5	16	68	244	116	32	140	70	106	95	128	8,60
M56	28	17	22	78	251	116	32	140	70	116	95	135	10,00
M64	28	17	22	96	251	116	32	140	70	116	95	135	11,00

Yeni
New